



ITT

Dia-Flo®
Diaphragm Valves

Diaphragm Valve Products

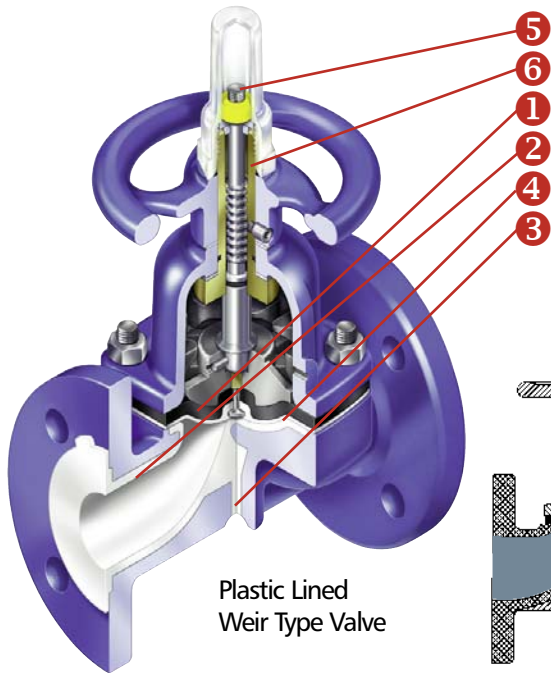
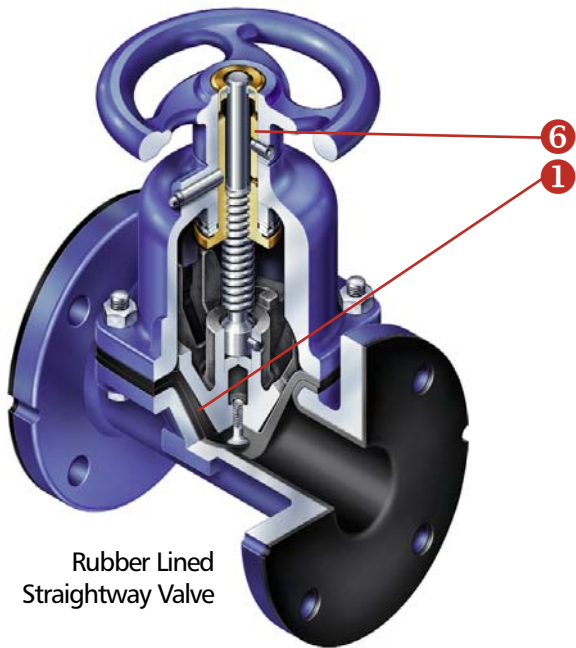
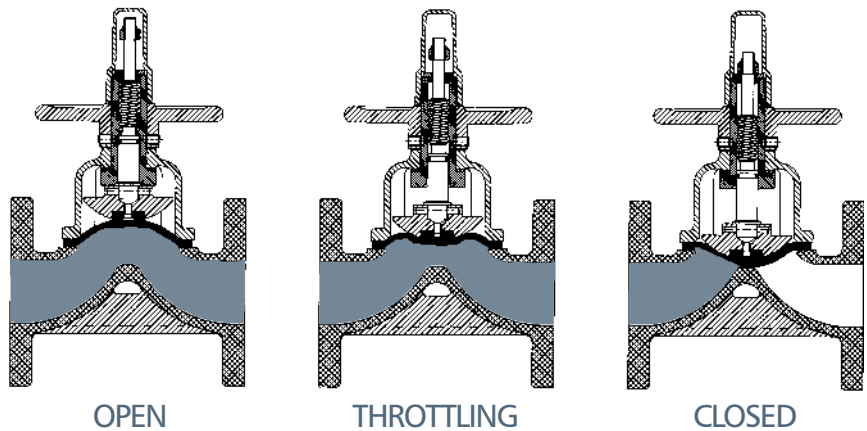
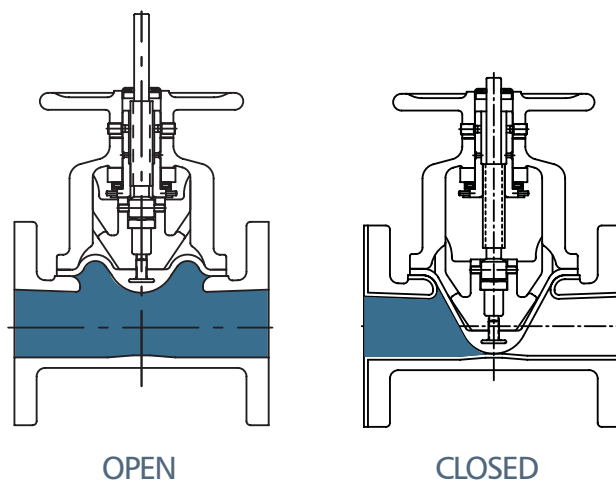


2. DIAPHRAGM VALVE PRODUCTS

Contained in this section:

- | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Weir Valves</p> <ul style="list-style-type: none"> ■ Features and Benefits ■ Body Selections ■ Diaphragm Selections ■ Bonnet Assembly Selections | <p>Straightway Valves</p> <ul style="list-style-type: none"> ■ Features and Benefits ■ Body Selections ■ Diaphragm Selections ■ Bonnet Assembly Selections <ul style="list-style-type: none"> ■ Finishes and Coatings |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Engineered for life

Features & Benefits

Weir Type Valve Modes of Operation

Straightway Valve Modes of Operation

Versatile and Economical

Broad range of body materials and diaphragm materials

- Metals
- Plastic Linings
- Rubber Linings
- Glass Linings
- Solid Plastic
- Choose from 12 grades of Elastomers or PTFE Diaphragms

Features & Benefits

Features & Benefits

1 Bonnet Isolation

- The diaphragm isolates the working parts of the valve from process fluids.

2 Streamlined Fluid Passage

- The smooth contoured body has minimal pockets, cavities or dead spaces, which prevent accumulation or stagnation of process fluids or contaminants.

No Packing Gland or Packing

- No more packing gland adjustment required or stem packing leakage problems for improved control of fugitive emissions.

Positive Leak Tight Closure

- Bubble tight closure is provided in accordance with MSS SP-88.

In-Line Maintenance

- Easily maintained when required for reduced downtime and lower cost of ownership.

3 Line-Lok*

- Unique feature in all plastic lined weir valves that prevents liner flexing over the weir, which reduces the potential for liner cracking.

4 Molded Closed 2-Piece PTFE Diaphragm*

- Diaphragms are molded to the exact contour of the weir for superior shutoff capabilities.
- 2-piece configuration eliminates delamination of PTFE which is common to 1-piece configurations.
- Superior flex life
- Reduced permeation
- Excellent chemical resistance

5 Adjustable Travel Stop

- Prevents overclosure of the valve and prolongs diaphragm life. The adjustability feature assures that leak-tight shutoff can be maintained throughout the valve's life.

6 Bronze Bushing

- Reduces turning torque and enhances cycle life in "dirty" atmospheres.

Sealed Bonnet

- Offers secondary process containment to control fugitive emissions.
- Supplied with leak detection port as standard.

Floating Tube Nut*

- Prevents point loading of the stud on PTFE diaphragms, which enhances diaphragm life, particularly in high temperature and high cycle applications.

100% Seat & Shell Testing

- All valves are pressure tested bubble tight prior to shipment. No visible leakage is allowed.

Extensive selection of body and diaphragm materials and actuation packages.

- Allows optimum selection of materials for service conditions, often without expensive upgrades.

* Weir type valve only